

## FRONT



## FLEXIBLE LINESET (GEN. 2)

**LENGTHS:** 25' & 50'

**SIZES:** 3/8" & 5/8" (for 25' & 50'), 1/2" & 7/8" (for 50' only)

**REFRIGERANTS:** R-134A, R-22, R-404A, R-407A/C/F, R-410A, R-448A, R-449A, R-450A, R-507, & R-513A

**MINIMUM BURST PRESSURE:** 2100 PSI

**MAXIMUM OPERATING PRESSURE:** 700 PSI

**OPERATING TEMP. RANGE:** -35 °F to 200 °F


**LUBRICANT/OIL:** POLYOLESTER OIL (POE), MINERAL OIL (MO), ALKYL BENZENE (AB), POLYVINYL ETHER (PVE), & POLYALKYLENE GLYCOL (PAG)

**CONNECTION:** PLUG & PLAY FITTINGS or COPPER STUB

**TUBE OD:** 3/8" (0.70"), 1/2" (0.81"), 5/8" (0.95" + 3/8" INSULATION), 7/8" (1.25" + 3/8" INSULATION)

**MINIMAL BEND RADIUS:** 3/8" (2.75"), 1/2" (3.25"), 5/8" (3.9"), 7/8" (5.0")

## LAYERS

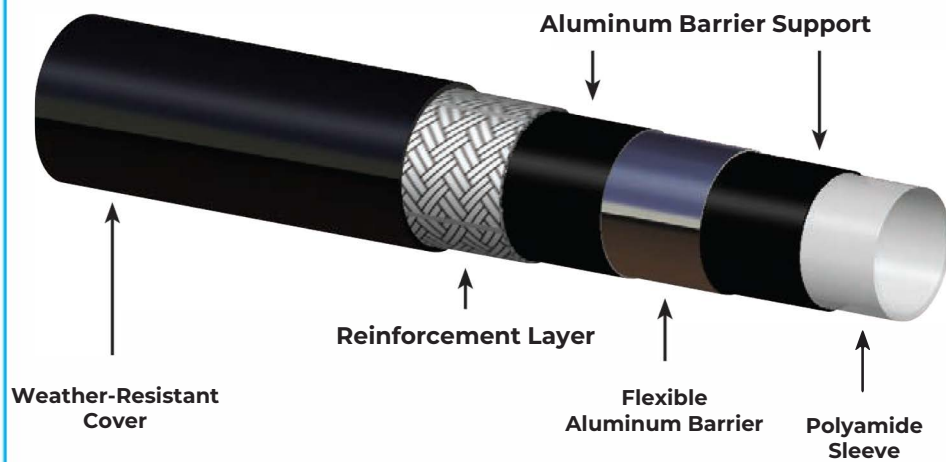

## NOTABLES:

CUSTOM SIZES AVAILABLE ON VOLUME ORDERS.

MULTIPLE LENGTHS CAN BE CONNECTED (SUCH AS TO FORM 75' LINESET).

RUNS BEYOND 100' REQUIRE ADDITIONAL ENGINEERING.

**EXCEL AIR SYSTEMS**  
120-20170 STEWART CRES.  
MAPLE RIDGE, BC V2X 0T4  
CANADA

TEL/FAX: 1-877-728-0757  
SALES@EXCELAIRSYSTEMS.COM